

United Kingdom**Concord:marlin Sales**

Avis Way, Newhaven
East Sussex BN9 0ED
Phone: +44 (0) 870 606 2030
Fax: +44 (0) 1273 611 101
sales@concordmarlin.com

Concord:marlin Export Sales
Avis Way, Newhaven
East Sussex BN9 0ED
Phone: +44 (0) 870 606 2030
Fax: +44 (0) 1273 512 688
concord.intsales@concordmarlin.com

Portugal**SLI Sylvania Lda.**

Campo Grande
1700-087 Lisboa
Phone: +351 21 793 77 36/37
Fax: +351 21 793 77 38
pt.info@sylvania-lighting.com

China - Hong Kong**Sylvania Asia Pacific Ltd.**

1008-9, 10F., Conic Investment Building
No. 13 Hok Yuen Street
Hung Hom, Kowloon
Hong Kong
Phone: +852 2369 5531
Fax: +852 2721 8621
sales-info@sylvania-asiapacific.com.hk

Thailand**Sylvania (Thailand) Ltd.**

19th floor, Ploenchit Center Bldg
2 Sukhumvit Soi 2, Klongtoey
Bangkok 10110
Phone: +66 2656 9039 to 45 / +66 2254 8885
Fax: +66 2254 3369 / +66 2254 7786
sylvania@sl.co.th
www.sli.co.th

Argentina**Sylvania Iluminacion S.A.**

Av. Leandro N. Alem No. 428, Piso 7
C1003AAR
Buenos Aires, Argentina
Phone: +54 11 4515-0215
Fax: +54 11 4515-0215

Brazil**Sylvania do Brasil Iluminação Ltda.**

Av. Adolfo Pinheiro, 1.000 - Conjunto 002
CEP 04733-100 / São Paulo / SP / Brasil
Phone: +55 11 5633 2400
Fax: +55 11 5524 0800

Colombia**SLI Colombia S.A.**

Calle 57B Sur No. 72A-23
Santafe de Bogota, Colombia
Phone: +57 1 782 5200
Fax: +57 1 782 5362

Costa Rica**Sylvania S.A.**

Parque Ind. Rohrmoser Las Pavas
PO Box 10130
San José, Costa Rica
Phone: +506 210-76-78
Fax: +506 232-87-23
marketing@sl-cr.com

Eastern Europe Sales**SLI Lichtsysteme GmbH**

Graf-Zeppelin-Strasse 9-12
D-91056 Erlangen
Phone: +49 (0) 9131 793 499
Fax: +49 (0) 9131 793 496
info.de@sylvania-lighting.com

Competence Center**SLI France S.A.**

11, rue Victor Grignard
Z.I. de Montreynaud
42000 Saint-Étienne
France
Phone: +33 477 92 27 30
Fax: +33 477 92 27 31
info.de@sylvania-lighting.com

CAT0273 7,200 04.2007

industrial lighting

SYLPROOF 2

PRO2 | PRO2 RAPID | CAP2

A luminaire range for the toughest application of all:

daily use

The right luminaire

for every situation

Good light has a lot of enemies...

- Water
- Dust
- Chemicals
- Grease
- Impacts and shocks
- UV radiation

...and protection to withstand them all: the SYLPROOF 2 range.

A moisture-proof luminaire should not only be water-resistant: true protection goes beyond the IP rating.

No environment is like any other:

SYLPROOF 2 offers you a comprehensive range because no environment is like any other. Carefully selected control gear and options combined with specially tuned accessories cover virtually every application.

Polycarbonate housing

- SYLPROOF PRO2 – the all-round solution
- SYLPROOF PRO2 RAPID – the solution for fast mounting.

Housing made of glassfibre-reinforced polyester

- SYLPROOF CAP2 – the solution for special requirements.

Mounting the easy way

- Ceiling or pendant mounting with optional stainless steel hooks for chain or wire suspension.
- Suitable for ceiling mounting with snap-on ceiling brackets supplied or for direct surface mounting by drilling through the housing.
- Redesigned perpendicular housing wire access and improved flat upper housing surfaces.

- Convenient channel mounting using additional accessories. Also available as a premounted model with integrated feed-through wiring.

Faster maintenance instantly:

We've done a little more to reduce your load:

- Brand new stainless steel sealing clips using innovative push/push system for convenient access to the gear tray during maintenance and mounting.
- Newly developed interchangeable gear tray holding brackets made of rigid polyamide.
- Rounded edges on the sealing clips allow for easy cleaning and reduced risk of injury.


Technology for a longer service life

Long-lasting, high-grade materials: foamed polyurethane seals, stainless steel closures, housing and diffusers made of high-quality plastics.

- Improved flat upper housing surfaces with no pits to attract deposits such as dust or other contamination.
- Diffusers with internal prism system for perfect light distribution and smooth outside surfaces.

One push is enough: the unique push/push system

- One push and the clip opens.
- The clips remain on the housing in the open position.
- Any mounting or maintenance operations can now be completed easily and quickly.
- A second push closes the housing and the luminaire is now firmly shut again.

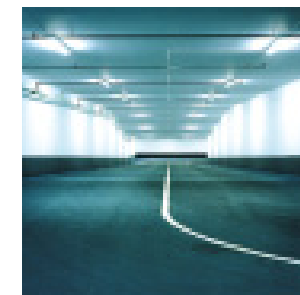

Car Parks

- CO₂ pollution
- Shocks
- Humidity



Storage

- Dust
- Impacts



Industrial

- Grease
- Chemical emissions
- Food production

Step 1



Step 2



Step 3




SYLPROOF PRO2 –
the all-round solution

- Tested quality with high mechanical strength – especially resistant to impact up to IK07 (with PC diffuser).
 - Good resistance to material stress and changes in ambient temperature between -20 °C* and 25 °C (magnetic gear).
 - High energy-efficiency especially with electronic ballast versions.
 - Polycarbonate housing in light grey colouring (RAL 7035) with up to three manual punch-outs (2 lamp housing) for cable entry.
 - Choice of UV-stabilized polycarbonate or acrylic diffuser with internal prism system for high light output and broad dispersion.
- Surrounding seal made of foamed polyurethane.
 - Gear tray made of rigid steel plate with a white paint finish, ready-wired, with electrical equipment. Mounting inside the housing with new interchangeable gear tray clips.
 - Novel stainless steel closure clips ensure permanent pressure between diffuser and housing to guarantee IP rating.
- Impressively easy mounting and maintenance**

 - Suitable for ceiling mounting with snap-on ceiling brackets supplied or for direct surface mounting by drilling through the housing.
- Special optional stainless steel hooks available for chain or wire suspension.
 - Newly developed push/push clips for convenient access to the gear tray during maintenance and mounting.
 - Available with electronic and magnetic control gear in NC (non-compensated) or PC (parallel-compensated) versions.
 - Extremely energy-efficient with electronic ballast available in many T5 (Ø16 mm) wattages.
 - Electronic control gear (ECG) for analogue dimming (1-10V) and emergency versions supplied as standard.
 - Convenient channel mounting using additional accessories or supplied as a premounted model with integrated feed-through wiring in cross-sections 5 x 1.5 mm² or 5 x 2.5 mm².


Photometric performance

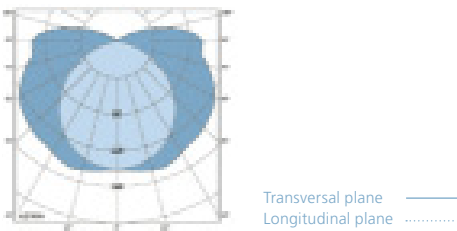

SYLPROOF PRO2 – 1x58W with acrylic diffuser

Wattages	LOR ¹	UTE ²	DFF ³
1 x 18	71%	0.60G+0.11T	85%
1 x 36	71%	0.60G+0.11T	85%
1 x 58	69%	0.58G+0.10T	85%
2 x 36	66%	0.59G+0.07T	90%
2 x 58	62%	0.56G+0.06T	90%
2 x 28	74%	0.68G+0.06T	92%
2 x 35	74%	0.68G+0.06T	92%

¹ Light Output Ratio working
² Union Technique de l'électricité
³ Downward Flux Fraction

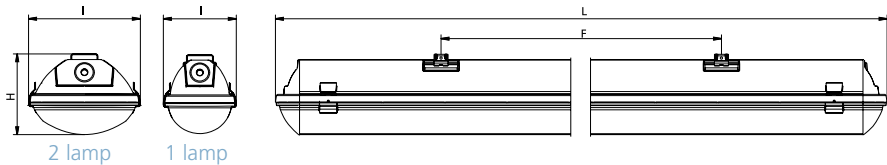

Dimensions

Wattages	L (mm)	I (mm)	H (mm)	F (mm)	Weight (kg)	
					Magnetic gear (B2)	Electronic gear
1 x 18	668	94	104	340	1.7	1.6
1 x 36/28/54	1276	94	104	850	2.5	2.2
1 x 58/35	1576	94	104	850	3.4	2.7
2 x 28	1276	94	104	850		2.2
2 x 35	1576	94	104	850		2.7
2 x 36	1276	144	106	850	3.9	3.3
2 x 58	1576	144	106	850	5.4	5.9


Technical data
• 240V/50Hz
• For ambient temperatures:
-20°C* to +25°C with magnetic ballast
0°C to 25°C with electronic control gear
• 3-way automatic terminal block (for cross-sections up to 2.5 mm²)
• T5 (Ø16 mm) lamp versions in 1 lamp body size.

* not in continuous use

For you we did more
**and now you
could do less!**

SYLPROOF **PRO2 RAPID** –
**the solution for
fast mounting**

- Fully equipped, ready-to-mount version of the SYLPROOF PRO2 available as 1 lamp or 2 lamp model.
- Supplied with suitable fluorescent lamps ready-fitted in light colour 840.
- Luminaire supplied with integrated single or double quick connector.
- UV-stabilized polycarbonate diffuser with internal prism system for high light output and broad light dispersion.
- Available with electronic and magnetic control gear in PC (parallel-compensated) version.
- 1 lamp luminaires with through wiring 3 x 1.5mm².
- 2 lamp luminaires with through wiring 3 x 2.5mm².

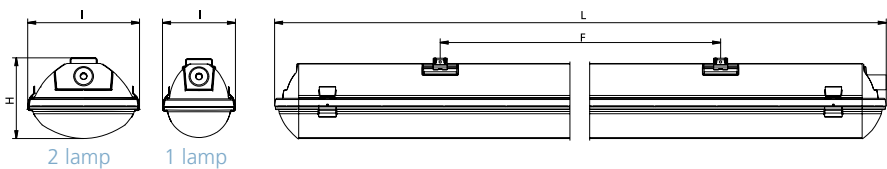

Dimensions

Wattages	L (mm)	I (mm)	H (mm)	F (mm)	Weight (kg)	
					Magnetic Gear (B2)	Electronic Gear
1 x 36	1276	94	104	850	2.7	2.4
1 x 58	1576	94	104	850	3.6	2.9
2 x 36	1276	144	106	850	4.3	3.7
2 x 58	1576	144	106	850	5.8	6.3

Per quick connector add 15mm to total length L.

Technical data

- 240V/50Hz
- For ambient temperatures:
-20°C* to +25°C with magnetic ballast
0°C to 25°C with electronic control gear


* not in continuous use

Connected instantly



Mounting is made fast and effortless with integrated quick connector fitted as standard.

Photometric performance

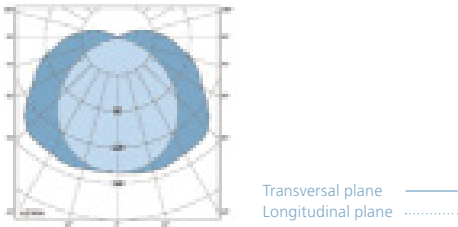

**SYLPROOF PRO2 RAPID – 2x58W
with polycarbonat diffuser**

Wattages	LOR ¹	UTE ²	DFF ³
1 x 36	73%	0.62G+0.11T	85%
1 x 58	71%	0.60G+0.11T	85%
2 x 36	68%	0.61G+0.07T	90%
2 x 58	64%	0.57G+0.06T	90%

¹ Light Output Ratio working
² Union Technique de l'électricité
³ Downward Flux Fraction

SYLPROOF CAP2 –
the solution for
special requirements


- Body made of extremely resistant glass fibre-reinforced polyester (SMC).
- Unequalled protection against chemicals.
- User-friendly and long-lasting materials.
- High stability due to compressed moulded parts.
- Diffuser made of high-grade polymethyl-methacrylate with internal prism system for high output and broad light dispersion.
- Surrounding seal made of foamed polyurethane.
- Gear tray made of rigid steel plate with white paint finish, ready-wired, with electrical equipment. Mounting inside the housing with new interchangeable gear tray clips.

- Novel stainless steel closure clips ensure permanent pressure between diffuser and housing to guarantee IP rating.

Impressively easy mounting and maintenance

- Suitable for ceiling mounting with snap-on ceiling brackets supplied or for direct surface mounting by drilling through the housing.
- Special optional stainless steel hooks available for chain or wire suspension.
- Newly developed push/push clips for convenient access to the gear tray during maintenance and mounting.
- Available with electronic or magnetic control gear in NC (non-compensated), PC (parallel-compensated) or SC (Serial compensated) versions.

- Extremely energy-efficient with electronic control gear, available in T8 (Ø 26 mm) wattages.
- Convenient channel mounting using additional accessories or supplied as a premounted model with integrated feed-through wiring in cross-sections 5 x 1.5 mm² or 5 x 2.5 mm².

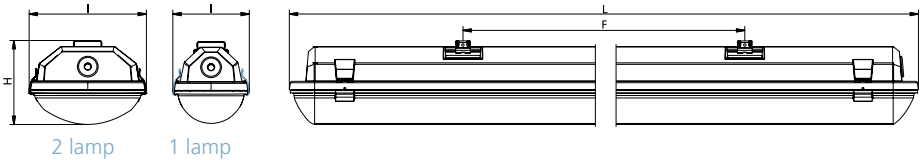


Dimensions

Wattages	L (mm)	I (mm)	H (mm)	F (mm)	Weight (kg)	
					Magnetic Gear (B2)	Electronic Gear
1 x 18	666	94	101	340	1.7	1.6
1 x 36	1276	94	101	850	2.6	2.3
1 x 58	1576	94	101	850	3.6	2.9
2 x 36	1276	144	103	850	4.1	3.5
2 x 58	1576	144	103	850	5.6	4.0

- Technical data
- 240V-50Hz
 - For environmental temperatures:
 - 20°C* to +25°C with magnetic ballast
 - 0°C to 25°C with electronic control gear
 - 3-way automatic terminal block (for cross-sections up to 2.5 mm²)

Photometric performance

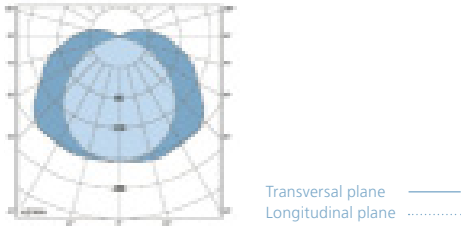

SYLPROOF CAP2 – 2x36W with PMMA diffuser

Wattages	LOR ¹	UTE ²	DFF ³
1 x 18	74%	0.63G+0.11T	85%
1 x 36	74%	0.63G+0.11T	85%
1 x 58	72%	0.61G+0.11T	85%
2 x 36	69%	0.62G+0.07T	90%
2 x 58	65%	0.59G+0.06T	90%

¹ Light Output Ratio working
² Union Technique de l'électricité
³ Downward Flux Fraction

* not in continuous use



Channel mounting/feed-through wiring:
When the luminaires are mounted in channels, take care not to use normal shroud cable as through wiring. Softening agents will migrate from the cable and harm the plastic parts of the luminaire.

Please note:
The luminaires cannot be used near chemical substances or vehicle exhausts (e.g. oil, petrol, petrol derivatives, liquid acids) because they could adversely affect/degrade some of the raw materials used.

RESISTANCE TO CHEMICALS AND CORROSIVE AGENTS
The table on the right shows the effect of various chemicals and corrosive agents on the different types of plastic used.

• • •	Resistant
• •	Semi-resistant
•	Non-resistant

This information should only be used as a guide. The true chemical compatibility can only be determined under the actual conditions in the final application. Please contact your local representative if any additional information is required.

SYLPROOF >>>	CAP2*	PRO2	PRO2	RAPID
	Polyester and fiberglass + PMMA	Polycarbonate + Acrylic	100% Polycarbonate	100% Polycarbonate
Ammonia	•	•	•	•
Acetic acid 5%	• • •	•	• • •	• • •
Acetic acid 10%	• • •	• •	• •	• •
Acetic acid 30%	•	•	•	•
Alcohol < 30%	• • •	• • •	• • •	• • •
Aluminium chloride	• • •	•	•	•
Aluminium sulfate	• •	• •	• •	• •
Ammonium nitrate	•	• • •	• • •	• • •
Amonium phosphate 10%	• • •	• • •	• • •	• • •
Boric acid	• • •	• • •	• • •	•
Carbon dioxide	• • •	• • •	• • •	• • •
Carbon monoxide	• • •	• • •	• • •	• •
Carbon tetrachloride	• • •	•	•	•
Caustic soda < 2%	• •	•	•	•
Ether	• • •	•	•	•
Formic acid 10%	•	• •	• •	•
Gallic acid	• •	• • •	• • •	• • •
Glycerin	• • •	•	•	•
Hydrocarbon	• •	• •	• • •	• • •
Haydrochloric acid	• •	•	•	•
Hydraulic oil	• • •	•	•	•
Kerosene	• • •	•	•	•
Lactic acid	• •	• •	• •	• •
Linseed oil	• • •	•	•	•
Lubricating oil	• • •	•	•	•
Mineral spirit	• • •	•	•	•
Nitric acid 10%	•	• •	• •	• •
Perhydrol (hydrogen peroxide)	• • •	• • •	• • •	•
Petroleum	• • •	• •	• •	• •
Phenol	•	•	•	•
Seawater	• •	• •	• •	• •
Sodium chloride	• • •	•	•	•
Sodium hydroxide 10%	•	•	•	•
Sulphuric acid 37.5% - Battery	• •	• • •	• • •	•
Turpentine	• • •	•	•	•
Vegetable oils	• • •	•	•	•
Xylene	• • •	•	•	•

* Not valid for SYLPROOF CAP2 emergency luminaires with polycarbonate diffuser.

WITH ACRYLIC DIFFUSER

Luminaire order codes for T8 (Ø 26 mm) fluorescent lamps

Wattages	Magnetic gear (B2)		Electronic control gear (A2)	Electronic control gear (A1) Analogue dimmable (1-10V)	Magnetic gear (B2) PC ²⁾ with through wiring ⁴⁾	Magnetic gear(B2) PC ²⁾ Equipped ⁶⁾
	NC ¹⁾	PC ²⁾				
1x18W	0045700	0045705	0045710		0045739	
1x36W	0045701	0045706	0045711	0045768	0045740	
1x58W	0045702	0045707	0045712	0045769	0045741	
2x36W	0045703	0045708	0045713	0045770	0045742	0045848
2x58W	0045704	0045709	0045714	0045771	0045743	0045849

Luminaire order codes for T5 (Ø 16 mm) fluorescent lamps

Wattages	Electronic control gear (A2)	Electronic control gear (A1) Analogue dimmable (1-10V)
1x28W	0045809	
1x35W	0045810	
1x54W	0045811	
2x28W	0045802	0045814
2x35W	0045803	0045815

T5 (Ø 16 mm) lamp versions in 1 lamp body size.

WITH POLYCARBONATE DIFFUSER

Luminaire order codes for T8 (Ø 26 mm) fluorescent lamps

Wattages	Magnetic gear (B2)		Electronic control gear (A2)	Electronic control gear (A1) Analogue dimmable (1-10V)	Electronic control gear (A2) with Fuse (3A) ⁵⁾	Electronic control gear (A2) Emergency ³⁾	
	NC ¹⁾	PC ²⁾				1h duration	3h duration
1x18W	0045690	0045715	0045763		0045917		
1x36W	0045691	0045716	0045764	0045772	0045918	0045781	0045777
1x58W	0045692	0045717	0045765	0045773	0045919	0045782	0045778
2x36W	0045693	0045718	0045766	0045774		0045783	0045779
2x58W	0045694	0045719	0045767	0045775		0045784	0045780

Luminaire order codes for T5 (Ø 16 mm) fluorescent lamps

Wattages	Electronic control gear (A2)	Electronic control gear (A1) Analogue dimmable (1-10V)	Electronic control gear (A2) Emergency ³⁾	
			1h duration	3h duration
1x28W	0045806			
1x35W	0045807			
1x54W	0045808			
2x28W	0045800	0045812	0045816	0045804
2x35W	0045801	0045813	0045817	0045805

¹⁾ Non-compensated
²⁾ Parallel-compensated
³⁾ On 2-lamp versions – only 1-lamp with emergency function
⁴⁾ 1 lamp with throuh wiring 5 x 1.5 mm²
2 lamp with through wiring 5 x 2.5 mm²
⁵⁾ Fused terminal block
⁶⁾ Luminaires supplied premounted

T5 (Ø 16 mm) lamp versions in 1 lamp body size.

WITH POLYCARBONATE DIFFUSER

Single sided quick connector

Wattages	Magnetic gear (B2) PC ²⁾	Electronic control gear (A2)
1x36W	0045639	0045643
1x58W	0045641	0045645
2x36W	0045640	0045644
2x58W	0045642	0045646

Luminaire supplied completely fitted with lamps in light colour 840. 2 lamp luminaires are delivered with through wiring 3 x 2.5 mm². 1 lamp luminaires are supplied with through wiring 3 x 1.5 mm².

Double sided quick connector

Wattages	Magnetic gear (B2) PC ²⁾	Electronic control gear (A2)
1x36W	0045647	0045651
1x58W	0045649	0045653
2x36W	0045648	0045652
2x58W	0045650	0045654

Luminaire supplied completely fitted with lamps in light colour 840. 2 lamp luminaires are delivered with through wiring 3 x 2.5 mm². 1 lamp luminaires are supplied with through wiring 3 x 1.5 mm².

SYLVANIA T8 LUXLINE PLUS

Lamp order codes for T8 (Ø 26 mm) fluorescent lamps

Wattages	Light colour	Light colour	Light colour	Light colour	Light colour
	827	830	835	840	850
18W	0001505	0001501	0000580	0001500	0002960
36W	0001514	0001511	0000578	0001510	0002961
58W	0001535	0001531	0001394	0001530	0002962

SYLVANIA T5 LUXLINE PLUS

Lamp order codes for T5 (Ø 16 mm) fluorescent lamps

Wattages	Light colour	Light colour	Light colour	Light colour
	830	835	840	865
28W	0002766	0002789	0002767	0002768
35W	0002769	0002790	0002770	0002771
54W	0002781	0002794	0002782	0002783

WITH PMMA DIFFUSER (Emergency versions with Polycarbonate diffuser)

Luminaire order codes for T8 (Ø 26 mm) fluorescent lamps

Wattages	Magnetic gear (B2)			Electronic control gear (A2)	Emergency ³⁾		Magnetic gear (B2) PC ²⁾ with through wiring ⁴⁾	Electronic control gear (A2) with through wiring ⁴⁾
	NC ¹⁾	PC ²⁾	SC ⁷⁾		Magnetic gear (B2) PC ²⁾ 1h duration	Electronic control gear (A2) 1h duration		
1x18W	0045920	0045926		0045932				
1x36W	0045921	0045927	0045960	0045933	0045675	0045679		
1x58W	0045922	0045928	0045961	0045934	0045677	0045681		
2x36W	0045924	0045930	0045963	0045936	0045676	0045680	0045981	0045983
2x58W	0045925	0045931	0045964	0045937	0045678	0045682	0045982	0045984

SYLVANIA T8 LUXLINE PLUS

Lamp order codes for T8 (Ø 26 mm) fluorescent lamps

Wattages	Light colour	Light colour	Light colour	Light colour	Light colour
	827	830	835	840	850
18W	0001505	0001501	0000580	0001500	0002960
36W	0001514	0001511	0000578	0001510	0002961
58W	0001535	0001531	0001394	0001530	0002962

1) Non-compensated
2) Parallel-compensated
3) On 2-lamp versions – only 1-lamp with emergency function
4) 1 lamp with throuh wiring 5 x 1.5 mm²
2 lamp with through wiring 5 x 2.5 mm²
5) Fused terminal block
6) Luminaires supplied premounted
7) Serial-compensated

Spare diffuser (1 pc.)



SYLPROOF PRO2 Rapid, PRO2, Material: Polycarbonate

Wattages	Order code
1 x 18	5045818
1 x 36	5045819
1 x 58	5045820
2 x 36	5045821
2 x 58	5045822


SYLPROOF PRO2 Material: Acrylic

Wattages	Order code
1 x 18	5045823
1 x 36	5045824
1 x 58	5045825
2 x 36	5045826
2 x 58	5045827

SYLPROOF CAP2 Material: PMMA

Wattages	Order code
1 x 18	5045970
1 x 36	5045971
1 x 58	5045972
2 x 36	5045973
2 x 58	5045974

Additional reflectors (1 pc.)



Wattages	Order code
1 x 36	5056750
1 x 58	5056752
2 x 36	5056751
2 x 58	5056753

Quick connector (1 pc.)

Order code: 5045979



Grommet for quick connector (1 pc.)

Order code: 5045980



Snap-on ceiling bracket (1 set = 2 pcs.)

Order code: 5045839



Gear tray clips (1 set = 2 pcs.)

Order code: 5045838



Push/push clips (1 set = 10 pcs.)

Order code: 5045837



Grommets (1 set = 10 pcs.)

Order code: 5045843



Suspension hooks (1 set = 50 pcs.)

Order code: 5045842



Through wiring (1 pc.)



5 x 1.5 mm²	
Wattages	Order code
1 x 18	5045832
1 x 36 / 28 / 54	5045833
1 x 58 / 35	5045834
5 x 2.5 mm²	
Wattages	Order code
2 x 36 / 28	5045835
2 x 58 / 35	5045836

Ceiling mounting set (1 set)

Order code: 5045841



Cable gland (1 pc.)

Order code: 5045840



Flexible tube (1 pc.)

Order code: 9056757



Unless stated otherwise, the accessories are suitable for all luminaires Sylproof PRO2 / PRO2 RAPID / CAP2.

SYLPROOF CROSS LIST OLD >> NEW 2007



ALT			NEU		
Art.-Nr.	Bezeichnung	Brutto ALT	Art.-Nr.	Bezeichnung	Brutto NEU
	SYLPROOF Pro			SYLPROOF Pro2	
			0045690	SYLPROOF PRO2 118 B2 NC POLY	54,90
			0045691	SYLPROOF PRO2 136 B2 NC POLY	60,80
			0045692	SYLPROOF PRO2 158 B2 NC POLY	79,70
			0045693	SYLPROOF PRO2 236 B2 NC POLY	93,80
			0045694	SYLPROOF PRO2 258 B2 NC POLY	110,90
0046700	Sylproof-Pro Acryl 1x18W VVG NC 3-pol.KI.	50,30	0045700	SYLPROOF PRO2 118 B2 NC ACRYLIC	50,30
0046701	Sylproof-Pro Acryl 1x36W VVG NC 3-pol.KI.	50,30	0045701	SYLPROOF PRO2 136 B2 NC ACRYLIC	50,30
0046702	Sylproof-Pro Acryl 1x58W VVG NC 3-pol.KI.	62,40	0045702	SYLPROOF PRO2 158 B2 NC ACRYLIC	62,40
0046703	Sylproof-Pro Acryl 2x36W VVG NC 3-pol.KI.	75,70	0045703	SYLPROOF PRO2 236 B2 NC ACRYLIC	75,70
0046704	Sylproof-Pro Acryl 2x58W VVG NC 3-pol.KI.	88,50	0045704	SYLPROOF PRO2 258 B2 NC ACRYLIC	88,50
0046705	Sylproof-Pro Acryl 1x18W VVG PC 3-pol.KI.	51,80	0045705	SYLPROOF PRO2 118 B2 PC ACRYLIC	51,80
0046706	Sylproof-Pro Acryl 1x36W VVG PC 3-pol.KI.	51,80	0045706	SYLPROOF PRO2 136 B2 PC ACRYLIC	51,80
0046707	Sylproof-Pro Acryl 1x58W VVG PC 3-pol.KI.	63,70	0045707	SYLPROOF PRO2 158 B2 PC ACRYLIC	63,70
0046708	Sylproof-Pro Acryl 2x36W VVG PC 3-pol.KI.	77,20	0045708	SYLPROOF PRO2 236 B2 PC ACRYLIC	77,20
0046709	Sylproof-Pro Acryl 2x58W VVG PC 3-pol.KI.	90,00	0045709	SYLPROOF PRO2 258 B2 PC ACRYLIC	90,00
0046710	Sylproof-Pro Acryl 1x18W EVG 3-pol.KI.	101,10	0045710	SYLPROOF PRO2 118 A2 ACRYLIC	101,10
0046711	Sylproof-Pro Acryl 1x36W EVG 3-pol.KI.	101,10	0045711	SYLPROOF PRO2 136 A2 ACRYLIC	101,10
0046712	Sylproof-Pro Acryl 1x58W EVG 3-pol.KI.	112,80	0045712	SYLPROOF PRO2 158 A2 ACRYLIC	112,80
0046713	Sylproof-Pro Acryl 2x36W EVG 3-pol.KI.	135,80	0045713	SYLPROOF PRO2 236 A2 ACRYLIC	135,80
0046714	Sylproof-Pro Acryl 2x58W EVG 3-pol.KI.	148,90	0045714	SYLPROOF PRO2 258 A2 ACRYLIC	148,90
0046715	Sylproof-Pro Poly. 1x18W VVG PC 3-pol.KI.	53,80	0045715	SYLPROOF PRO2 118 B2 PC POLY	53,80
0046716	Sylproof-Pro Poly. 1x36W VVG PC 3-pol.KI.	59,30	0045716	SYLPROOF PRO2 136 B2 PC POLY	59,30
0046717	Sylproof-Pro Poly. 1x58W VVG PC 3-pol.KI.	77,20	0045717	SYLPROOF PRO2 158 B2 PC POLY	77,20
0046718	Sylproof-Pro Poly. 2x36W VVG PC 3-pol.KI.	90,50	0045718	SYLPROOF PRO2 236 B2 PC POLY	90,50
0046719	Sylproof-Pro Poly. 2x58W VVG PC 3-pol.KI.	106,60	0045719	SYLPROOF PRO2 258 B2 PC POLY	106,60
0046739	Sylproof-Pro Acryl 1x18W VVG PC 3-pol.KI. +DV	67,90	0045739	SYLPROOF PRO2 118 B2 PC ACRYLIC +DV 5x1,5mm ²	67,90
0046740	Sylproof-Pro Acryl 1x36W VVG PC 3-pol.KI. +DV	77,40	0045740	SYLPROOF PRO2 136 B2 PC ACRYLIC +DV 5x1,5mm ²	77,40
0046741	Sylproof-Pro Acryl 1x58W VVG PC 3-pol.KI. +DV	87,40	0045741	SYLPROOF PRO2 158 B2 PC ACRYLIC +DV 5x1,5mm ²	87,40
0046742	Sylproof-Pro Acryl 2x36W VVG PC 3-pol.KI. +DV	101,70	0045742	SYLPROOF PRO2 236 B2 PC ACRYLIC +DV 5x2,5mm ²	101,70
0046743	Sylproof-Pro Acryl 2x58W VVG PC 3-pol.KI. +DV	119,40	0045743	SYLPROOF PRO2 258 B2 PC ACRYLIC +DV 5x2,5mm ²	119,40
0046763	Sylproof-Pro Poly. 1x18W EVG 3-pol.KI.	103,20	0045763	SYLPROOF PRO2 118 POLY A2	103,20
0046764	Sylproof-Pro Poly. 1x36W EVG 3-pol.KI.	108,70	0045764	SYLPROOF PRO2 136 POLY A2	108,70
0046765	Sylproof-Pro Poly. 1x58W EVG 3-pol.KI.	127,00	0045765	SYLPROOF PRO2 158 POLY A2	127,00
0046766	Sylproof-Pro Poly. 2x36W EVG 3-pol.KI.	150,10	0045766	SYLPROOF PRO2 236 POLY A2	150,10
0046767	Sylproof-Pro Poly. 2x58W EVG 3-pol.KI.	166,40	0045767	SYLPROOF PRO2 258 POLY A2	166,40
			0045768	SYLPROOF PRO2 136 A1 ACRYLIC dimmbar 1-10V	164,50
			0045769	SYLPROOF PRO2 158 A1 ACRYLIC dimmbar 1-10V	176,90
			0045770	SYLPROOF PRO2 236 A1 ACRYLIC dimmbar 1-10V	201,20
			0045771	SYLPROOF PRO2 258 A1 ACRYLIC dimmbar 1-10V	215,10
			0045772	SYLPROOF PRO2 136 A1 POLY dimmbar 1-10V	172,50
			0045773	SYLPROOF PRO2 158 A1 POLY dimmbar 1-10V	191,90
			0045774	SYLPROOF PRO2 236 A1 POLY dimmbar 1-10V	216,40
			0045775	SYLPROOF PRO2 258 A1 POLY dimmbar 1-10V	233,70
0053742	Sylproof-Pro Poly. 1x36W EVG 3-pol.KI. +NOTLICHT 3h	422,80	0045777	SYLPROOF PRO2 136 A2 POLY 3h NOTLICHT	398,00
0053743	Sylproof-Pro Poly. 1x58W EVG 3-pol.KI. +NOTLICHT 3h	430,40	0045778	SYLPROOF PRO2 158 A2 POLY 3h NOTLICHT	417,00
0053744	Sylproof-Pro Poly. 2x36W EVG 3-pol.KI. +NOTLICHT 3h	442,50	0045779	SYLPROOF PRO2 236 A2 POLY 3h NOTLICHT	440,10
0053745	Sylproof-Pro Poly. 2x58W EVG 3-pol.KI. +NOTLICHT 3h	454,50	0045780	SYLPROOF PRO2 258 A2 POLY 3h NOTLICHT	456,40
			0045781	SYLPROOF PRO2 136 A2 POLY 1h NOTLICHT	353,70
			0045782	SYLPROOF PRO2 158 A2 POLY 1h NOTLICHT	372,00
0053765	Sylproof-Pro Poly. 2x36W EVG 3-pol.KI. +NOTLICHT 1h	398,70	0045783	SYLPROOF PRO2 236 A2 POLY 1h NOTLICHT	395,10
0053766	Sylproof-Pro Poly. 2x58W EVG 3-pol.KI. +NOTLICHT 1h	425,00	0045784	SYLPROOF PRO2 258 A2 POLY 1h NOTLICHT	411,40
5046698	Sylproof-Pro Poly. 2x36W EVG (A3) 3-pol.KI.	124,70		kein Ersatz, bitte EVG (A2) einsetzen!	
5046699	Sylproof-Pro Poly. 2x58W EVG (A3) 3-pol.KI.	141,10		kein Ersatz, bitte EVG (A2) einsetzen!	
0046848	Sylproof-Pro Acryl 2x36W VVG PC 3-pol.KI. +vormontiert	107,10	0045848	SYLPROOF PRO2 236 B2 PC ACRYLIC VORMONTIERT	107,10
0046849	Sylproof-Pro Acryl 2x58W VVG PC 3-pol.KI. +vormontiert	129,20	0045849	SYLPROOF PRO2 258 B2 PC ACRYLIC VORMONTIERT	129,20
0046917	Sylproof PRO 118 POLY HF FUSE		0045917	SYLPROOF Pro2 118 A2 POLY+SICHERUNG IN KLEMME	113,40
0046918	Sylproof PRO 136 POLY HF FUSE		0045918	SYLPROOF Pro2 136 A2 POLY+SICHERUNG IN KLEMME	119,20
0046919	Sylproof PRO 158 POLY HF FUSE		0045919	SYLPROOF Pro2 158 A2 POLY+SICHERUNG IN KLEMME	138,60

ALT			NEU		
Art.-Nr.	Bezeichnung	Brutto ALT	Art.-Nr.	Bezeichnung	Brutto NEU
SYLPROOF Pro T5			SYLPROOF Pro2 T5		
5053768	Sylproof-Pro Poly. 2x28W T5 +NOTLICHT 3h	386,60	0045804	SYLPROOF PRO2 T5 228 A2 3h NOTLICHT	5410288458045 409,80
5053769	Sylproof-Pro Poly. 2x35W T5 +NOTLICHT 3h	394,30	0045805	SYLPROOF PRO2 T5 235 A2 3h NOTLICHT	5410288458052 418,00
5053771	Sylproof-Pro Poly. 2x28W T5 3-pol.KI.	138,00	0045800	SYLPROOF PRO2 T5 228 A2 POLY	5410288458007 146,30
5053772	Sylproof-Pro Poly. 2x35W T5 3-pol.KI.	145,70	0045801	SYLPROOF PRO2 T5 235 A2 POLY	5410288458014 154,40
5053774	Sylproof-Pro Acryl 2x28W T5 3-pol.KI.	134,70	0045802	SYLPROOF PRO2 T5 228 A2 ACRYLIC	5410288458021 142,80
5053775	Sylproof-Pro Acryl 2x35W T5 3-pol.KI.	140,20	0045803	SYLPROOF PRO2 T5 235 A2 ACRYLIC	5410288458038 148,60
			0045806	SYLPROOF PRO2 T5 128 A2 POLY	5410288458069 134,30
			0045807	SYLPROOF PRO2 T5 135 A2 POLY	5410288458076 139,80
			0045808	SYLPROOF PRO2 T5 154 A2 POLY	5410288458083 144,70
			0045809	SYLPROOF PRO2 T5 128 A2 ACRYLIC	5410288458090 131,50
			0045810	SYLPROOF PRO2 T5 135 A2 ACRYLIC	5410288458106 134,30
			0045811	SYLPROOF PRO2 T5 154 A2 ACRYLIC	5410288458113 140,90
			0045812	SYLPROOF PRO2 T5 228 A1 POLY dimmbar 1-10V	5410288458120 232,70
			0045813	SYLPROOF PRO2 T5 235 A1 POLY dimmbar 1-10V	5410288458137 240,80
			0045814	SYLPROOF PRO2 T5 228 A1 ACRYLIC dimmbar 1-10V	5410288458144 228,90
			0045815	SYLPROOF PRO2 T5 235 A1 ACRYLIC dimmbar 1-10V	5410288458151 235,30
			0045816	SYLPROOF PRO2 T5 228 A2 1h NOTLICHT	5410288458168 334,30
			0045817	SYLPROOF PRO2 T5 235 A2 1h NOTLICHT	5410288458175 364,40
ZUBEHÖR SYLPROOF Pro			ZUBEHÖR SYLPROOF Pro2		
5056734	Sylproof Pro Edelstahl-Clip	0,70	5045837	SYLPROOF V2A Wannen-Klip PRO2/Rapid /CAP2 VE=10	0664608458375 3,80
5056735	Sylproof Pro Edelstahl-Deckenbefestigungsklammer (1St.)	1,00	5045839	SYLPROOF Deckenbefestigungskl. PRO2/Rapid /CAP2 VE=2	0664608458399 1,00
5056737	Sylproof-Pro DV-5x1.5 mm² für 1x18 W + Klammern	18,30	5045832	SYLPROOF DV+Klammer 5X1,5MM² 118 PRO2/Rapid /CAP2	0664608458320 18,30
5056738	Sylproof-Pro DV-5x1.5 mm² für 1x36 W + Klammern	21,00	5045833	SYLPROOF DV+Klammer 5X1,5MM² 136 PRO2/Rapid /CAP2	0664608458337 21,00
5056739	Sylproof-Pro DV-5x1.5 mm² für 1x58 W + Klammern	22,50	5045834	SYLPROOF DV+Klammer 5X1,5MM² 158 PRO2/Rapid /CAP2	0664608458334 22,50
5056740	Sylproof-Pro DV-5x2.5 mm² für 2x36 W + Klammern	23,50	5045835	SYLPROOF DV+Klammer 5X2,5MM² 236 PRO2/Rapid /CAP2	0664608458351 23,50
5056741	Sylproof-Pro DV-5x2.5 mm² für 2x58 W + Klammern	26,20	5045836	SYLPROOF DV+Klammer 5X2,5MM² 258 PRO2/Rapid /CAP2	0664608458368 26,20
5056750	Sylproof-Pro Reflektor 1x36W	23,60	5056750	SYLPROOF REFLEKTOR PRO2 136	0664608567503 23,60
5056751	Sylproof-Pro Reflektor 2x36W	32,20	5056751	SYLPROOF REFLEKTOR PRO2 236	0664608567510 32,20
5056752	Sylproof-Pro Reflektor 1x58W	27,00	5056752	SYLPROOF REFLEKTOR PRO2 158	0664608567527 27,00
5056753	Sylproof-Pro Reflektor 2x58W	35,90	5056753	SYLPROOF REFLEKTOR PRO2 258	0664608567534 35,90
9056757	Sylproof Pro Flex-Rohr+16mm Verschraubung	3,80	9056757	SYLPROOF Flex-Rohr+16mm Verschraubung	5410288567570 3,80
5056729	Sylproof Ersatzwanne POLY 118	34,40	5045818	SYLPROOF Ersatzwanne POLY 118 PRO2	0664608458184 31,60
5056730	Sylproof Ersatzwanne POLY 136	34,40	5045819	SYLPROOF Ersatzwanne POLY 136 PRO2	0664608458191 31,60
5056731	Sylproof Ersatzwanne POLY 158	47,30	5045820	SYLPROOF Ersatzwanne POLY 158 PRO2	0664608458207 43,80
5056732	Sylproof Ersatzwanne POLY 236	48,80	5045821	SYLPROOF Ersatzwanne POLY 236 PRO2	0664608458214 45,20
5056733	Sylproof Ersatzwanne POLY 258	57,70	5045822	SYLPROOF Ersatzwanne POLY 258 PRO2	0664608458221 53,30
5056720	Sylproof Ersatzwanne ACRYLIC 118	27,00	5045823	SYLPROOF Ersatzwanne ACRYLIC 118 PRO2	0664608458238 24,00
5056721	Sylproof Ersatzwanne ACRYLIC 136	27,00	5045824	SYLPROOF Ersatzwanne ACRYLIC 136 PRO2	0664608458245 24,90
5056722	Sylproof Ersatzwanne ACRYLIC 158	34,40	5045825	SYLPROOF Ersatzwanne ACRYLIC 158 PRO2	0664608458252 31,60
5056723	Sylproof Ersatzwanne ACRYLIC 236	35,70	5045826	SYLPROOF Ersatzwanne ACRYLIC 236 PRO2	0664608458269 33,10
5056724	Sylproof Ersatzwanne ACRYLIC 258	41,50	5045827	SYLPROOF Ersatzwanne ACRYLIC 258 PRO2	0664608458276 38,50
0053717	Sylproof Pro Kabeleinführungsstüle (1 St.)	0,40	5045843	SYLPROOF Kabeleinführungsstüle PRO2-CAP2-ECO2 VE=10	0664608458436 1,80
5046989	Kabelverschraubung IP67 für Durchgangsvendr. Sylproof CAP	2,80	5045840	SYLPROOF M20 KABELVERSCHRAUBUNG PRO2/Rapid /CAP2	0664608458405 2,80
9083019	Feuchtraumleuchten Abhängehaken (2 Stück)	2,30	5045842	SYLPROOF ABHÄNGEHAKEN PRO2-CAP2-ECO2 VE=50	0664608458429 7,00
SYLPROOF Cap			SYLPROOF Cap2		
0046684	Sylproof-CAP 1x18W VVG NC&PC 5-pol.KI.	65,20		kein Ersatz, bitte VVG (B2) NC Type einsetzen!	
0046685	Sylproof-CAP 1x36W VVG NC&PC 5-pol.KI.	65,20		kein Ersatz, bitte VVG (B2) NC Type einsetzen!	
0046686	Sylproof-CAP 1x58W VVG NC&PC 5-pol.KI.	80,20		kein Ersatz, bitte VVG (B2) NC Type einsetzen!	
0046687	Sylproof-CAP 2x18W VVG NC&PC 5-pol.KI.	70,20		kein Ersatz!	
0046688	Sylproof-CAP 2x36W VVG NC&PC 5-pol.KI.	96,90		kein Ersatz, bitte VVG (B2) NC Type einsetzen!	
0046689	Sylproof-CAP 2x58W VVG NC&PC 5-pol.KI.	112,80		kein Ersatz, bitte VVG (B2) NC Type einsetzen!	
0046920	Sylproof-CAP 1x18W VVG NC 3-pol.KI.	62,90	0045920	SYLPROOF CAP2 118 B2 NC PMMA	5410288459202 62,90
0046921	Sylproof-CAP 1x36W VVG NC 3-pol.KI.	62,90	0045921	SYLPROOF CAP2 136 B2 NC PMMA	5410288459219 62,90
0046922	Sylproof-CAP 1x58W VVG NC 3-pol.KI.	78,00	0045922	SYLPROOF CAP2 158 B2 NC PMMA	5410288459226 78,00
0046923	Sylproof-CAP 2x18W VVG NC 3-pol.KI.	67,90		kein Ersatz!	
0046924	Sylproof-CAP 2x36W VVG NC 3-pol.KI.	94,60	0045924	SYLPROOF CAP2 236 B2 NC PMMA	5410288459240 94,60
0046925	Sylproof-CAP 2x58W VVG NC 3-pol.KI.	110,60	0045925	SYLPROOF CAP2 258 B2 NC PMMA	5410288459257 110,60
0046926	Sylproof-CAP 1x18W VVG PC 3-pol.KI.	67,30	0045926	SYLPROOF CAP2 118 B2 PC PMMA	5410288459264 67,30
0046927	Sylproof-CAP 1x36W VVG PC 3-pol.KI.	74,30	0045927	SYLPROOF CAP2 136 B2 PC PMMA	5410288459271 74,30
0046928	Sylproof-CAP 1x58W VVG PC 3-pol.KI.	96,60	0045928	SYLPROOF CAP2 158 B2 PC PMMA	5410288459288 96,60
0046929	Sylproof-CAP 2x18W VVG PC 3-pol.KI.	72,10		kein Ersatz!	
0046930	Sylproof-CAP 2x36W VVG PC 3-pol.KI.	112,80	0045930	SYLPROOF CAP2 236 B2 PC PMMA	5410288459301 112,80
0046931	Sylproof-CAP 2x58W VVG PC 3-pol.KI.	133,60	0045931	SYLPROOF CAP2 258 B2 PC PMMA	5410288459318 133,60
0046932	Sylproof-CAP 1x18W EVG 3-pol.KI.	129,20	0045932	SYLPROOF CAP2 118 A2 PMMA	5410288459325 129,20
0046933	Sylproof-CAP 1x36W EVG 3-pol.KI.	135,80	0045933	SYLPROOF CAP2 136 A2 PMMA	5410288459332 135,80
0046934	Sylproof-CAP 1x58W EVG 3-pol.KI.	158,80	0045934	SYLPROOF CAP2 158 A2 PMMA	5410288459349 158,80
0046935	Sylproof-CAP 2x18W EVG 3-pol.KI.	133,60		kein Ersatz!	
0046936	Sylproof-CAP 2x36W EVG 3-pol.KI.	187,30	0045936	SYLPROOF CAP2 236 A2 PMMA	5410288459363 187,30
0046937	Sylproof-CAP 2x58W EVG 3-pol.KI.	207,00	0045937	SYLPROOF CAP2 258 A2 PMMA	5410288459370 207,00

SYLPROOF CROSS LIST OLD >> NEW 2007



ALT			NEU		
Art.-Nr.	Bezeichnung	Brutto ALT	Art.-Nr.	Bezeichnung	Brutto NEU
0046675	Sylproof CAP 136 B2 PC POLY 1H EMERGENCY		0045675	SYLPROOF CAP2 136 B2 PC POLY 1h NOTLICHT	319,00
0046676	Sylproof CAP 236 B2 PC POLY 1H EMERGENCY		0045676	SYLPROOF CAP2 236 B2 PC POLY 1h NOTLICHT	357,80
0046677	Sylproof CAP 158 B2 PC POLY 1H EMERGENCY		0045677	SYLPROOF CAP2 158 B2 PC POLY 1h NOTLICHT	341,60
0046678	Sylproof CAP 258 B2 PC POLY 1H EMERGENCY		0045678	SYLPROOF CAP2 258 B2 PC POLY 1h NOTLICHT	378,60
			0045679	SYLPROOF CAP2 136 A2 POLY 1h NOTLICHT	380,80
			0045680	SYLPROOF CAP2 236 A2 POLY 1h NOTLICHT	432,30
			0045681	SYLPROOF CAP2 158 A2 POLY 1h NOTLICHT	403,80
			0045682	SYLPROOF CAP2 258 A2 POLY 1h NOTLICHT	452,00
0046960	Sylproof-CAP 1x36W VVG CS 3-pol.KI.	95,90	0045960	SYLPROOF CAP2 136VVG SC PMMA (Reihenkompensiert!) *	74,30
0046961	Sylproof-CAP 1x58W VVG CS 3-pol.KI.	113,90	0045961	SYLPROOF CAP2 158VVG SC PMMA (Reihenkompensiert!) *	96,60
0046963	Sylproof-CAP 2x36W VVG CS 3-pol.KI.	122,60	0045963	SYLPROOF CAP2 236VVG SC PMMA (Reihenkompensiert!) *	112,80
0046964	Sylproof-CAP 2x58W VVG CS 3-pol.KI.	145,70	0045964	SYLPROOF CAP2 258VVG SC PMMA (Reihenkompensiert!) *	133,60
			0045981	SYLPROOF CAP 236 B2 PC PMMA + DV 5X2.5MM²	133,10
0046982	Sylproof-CAP 2x58W VVG PC 3-pol.KI. +DV	150,10	0045982	SYLPROOF CAP 258 B2 PC PMMA + DV 5X2.5MM²	150,10
			0045983	SYLPROOF CAP 236 A2 PMMA + DV 5X2.5MM²	203,20
0046984	Sylproof-CAP 2x58W EVG +DV	212,40	0045984	SYLPROOF CAP 258 A2 PMMA + DV 5X2.5MM²	212,40
	ZUBEHÖR SYLPROOF Cap			ZUBEHÖR SYLPROOF Cap2	
0053729	Sylproof CAP Edelstahl-Clip	0,80	0045837	SYLPROOF PUSH-PUSH V2A Klip PRO2/Rapid /CAP2 VE=10	3,80
0046988	Sylproof-CAP Abhängehaken Edelstahl	3,90	0045842	SYLPROOF ABHÄNGEHAKEN PRO2-CAP2-ECO2 VE=50	7,00
0046989	Kabelverschraubung IP67 für Durchgangsvdr. Sylproof CAP	2,80	0045840	SYLPROOF M20 KABELVERSCHRAUBUNG PRO2/Rapid /CAP2	2,80
0046990	Sylproof-CAP Reflektor 1x36W	59,10	0056750	SYLPROOF REFLEKTOR PRO2/CAP2 1x36W	23,60
0046991	Sylproof-CAP Reflektor 1x58W	60,50	0056752	SYLPROOF REFLEKTOR PRO2/CAP2 1x58W	27,00
0046992	Sylproof-CAP Reflektor 2x36W	66,10	0056751	SYLPROOF REFLEKTOR PRO2/CAP2 2x36W	32,20
0046993	Sylproof-CAP Reflektor 2x58W	68,50	0056753	SYLPROOF REFLEKTOR PRO2/CAP2 2x58W	35,90
0046994	Sylproof-CAP DV 5x1.5 mm² für 1x18W + Klammern	18,30	0045832	SYLPROOF DV+Klammer 5X1,5MM² 118 PRO2/Rapid /CAP2	18,30
0046995	Sylproof-CAP DV 5x1.5 mm² für 1x36W + Klammern	20,90	0045833	SYLPROOF DV+Klammer 5X1,5MM² 136 PRO2/Rapid /CAP2	21,00
0046996	Sylproof-CAP DV 5x1.5 mm² für 1x58W + Klammern	22,50	0045834	SYLPROOF DV+Klammer 5X1,5MM² 158 PRO2/Rapid /CAP2	22,50
0046997	Sylproof-CAP DV 5x2.5 mm² für 2x18W + Klammern	19,00		kein Ersatz!	
0046998	Sylproof-CAP DV 5x2.5 mm² für 2x36W + Klammern	23,50	0045835	SYLPROOF DV+Klammer 5X2,5MM² 236 PRO2/Rapid /CAP2	23,50
0046999	Sylproof-CAP DV 5x2.5 mm² für 2x58W + Klammern	26,20	0045836	SYLPROOF DV+Klammer 5X2,5MM² 258 PRO2/Rapid /CAP2	26,20
9083019	Feuchtraumleuchten Abhängehaken (2 Stück)	2,30	0045842	SYLPROOF ABHÄNGEHAKEN PRO2-CAP2-ECO2 VE=50	7,00
0053701	Sylproof CAP Ersatzwanne PMMA 1x18W	24,00	0045970	SYLPROOF Ersatzwanne PMMA 118 CAP2	24,00
0053702	Sylproof CAP Ersatzwanne PMMA 1x36W	24,90	0045971	SYLPROOF Ersatzwanne PMMA 136 CAP2	24,90
0053703	Sylproof CAP Ersatzwanne PMMA 1x58W	31,60	0045972	SYLPROOF Ersatzwanne PMMA 158 CAP2	31,60
0053705	Sylproof CAP Ersatzwanne PMMA 2x36W	33,10	0045973	SYLPROOF Ersatzwanne PMMA 236 CAP2	33,10
0053706	Sylproof CAP Ersatzwanne PMMA 2x58W	38,50	0045974	SYLPROOF Ersatzwanne PMMA 258 CAP2	38,50
0053707	Sylproof CAP Ersatzwanne Polycarbonat 1x18W	31,60	0045818	SYLPROOF Ersatzwanne Polycarbonat 118 PRO2	31,60
0053708	Sylproof CAP Ersatzwanne Polycarbonat 1x36W	31,60	0045819	SYLPROOF Ersatzwanne Polycarbonat 136 PRO2	31,60
0053709	Sylproof CAP Ersatzwanne Polycarbonat 1x58W	43,80	0045820	SYLPROOF Ersatzwanne Polycarbonat 158 PRO2	43,80
0053711	Sylproof CAP Ersatzwanne Polycarbonat 2x36W	45,20	0045821	SYLPROOF Ersatzwanne Polycarbonat 236 PRO2	45,20
0053712	Sylproof CAP Ersatzwanne Polycarbonat 2x58W	53,30	0045822	SYLPROOF Ersatzwanne Polycarbonat 258 PRO2	53,30
	SYLPROOF Eco			SYLPROOF Eco2	
0046852	Sylproof ECO 136NC		0045852	SYLPROOF ECO2 136 B2 NC STYREN	41,90
0046853	Sylproof ECO 158NC		0045853	SYLPROOF ECO2 158 B2 NC STYREN	54,60
0046854	Sylproof ECO 236NC		0045854	SYLPROOF ECO2 236 B2 NC STYREN	68,70
0046855	Sylproof ECO 258NC		0045855	SYLPROOF ECO2 258 B2 NC STYREN	82,30
0046856	Sylproof-ECO 1x36W KVG CS		0045856	SYLPROOF ECO2 136 B2 SC STYREN	43,40
0046857	Sylproof-ECO 1x58W KVG CS		0045857	SYLPROOF ECO2 158 B2 SC STYREN	56,00
0046858	Sylproof-ECO 2x36W KVG CS		0045858	SYLPROOF ECO2 236 B2 SC STYREN	70,30
0046859	Sylproof-ECO 2x58W KVG CS		0045859	SYLPROOF ECO2 258 B2 SC STYREN	83,90
0046900	Sylproof ECO 236PC STYREN	63,40	0045900	SYLPROOF ECO2 236 B2 PC STYREN	63,40
0046902	Sylproof ECO 136PC STYREN	47,20	0045902	SYLPROOF ECO2 136 B2 PC STYREN	47,20
0046903	Sylproof ECO 158PC STYREN	54,90	0045903	SYLPROOF ECO2 158 B2 PC STYREN	54,90
0046904	Sylproof ECO 258PC STYREN	78,30	0045904	SYLPROOF ECO2 258 B2 PC STYREN	78,30
0046990	Sylproof ECO 236 A2 STYREN				
	ZUBEHÖR SYLPROOF Eco			ZUBEHÖR SYLPROOF Eco2	
5056725	Sylproof ECO Ersatzwanne STYREN 1x36W		5045828	SYLPROOF Ersatzwanne STYREN 136 ECO2	21,80
5056726	Sylproof ECO Ersatzwanne STYREN 1x58W		5045829	SYLPROOF Ersatzwanne STYREN 158 ECO2	29,40
5056727	Sylproof ECO Ersatzwanne STYREN 2x36W		5045830	SYLPROOF Ersatzwanne STYREN 236 ECO2	30,60
5056728	Sylproof ECO Ersatzwanne STYREN 2x58W		5045831	SYLPROOF Ersatzwanne STYREN 258 ECO2	34,80

ALT			NEU		
Art.-Nr.	Bezeichnung	Brutto ALT	Art.-Nr.	Bezeichnung	Brutto NEU
				SYLPROOF Pro2 RAPID S= single side D= double side, Leitungseinführung	
			0045639	RAP.S SYLPROOF PRO2 136 B2 PC POLY 840	67,70
			0045640	RAP.S SYLPROOF PRO2 236 B2 PC POLY 840	105,70
			0045641	RAP.S SYLPROOF PRO2 158 B2 PC POLY 840	87,20
			0045642	RAP.S SYLPROOF PRO2 258 B2 PC POLY 840	123,70
			0045643	RAP.S SYLPROOF PRO2 136 A2 POLY 840	120,10
			0045644	RAP.S SYLPROOF PRO2 236 A2 POLY 840	168,90
			0045645	RAP.S SYLPROOF PRO2 158 A2 POLY 840	139,90
			0045646	RAP.S SYLPROOF PRO2 258 A2 POLY 840	187,10
			0045647	RAP.D SYLPROOF PRO2 136 B2 PC POLY 840	80,50
			0045648	RAP.D SYLPROOF PRO2 236 B2 PC POLY 840	118,50
			0045649	RAP.D SYLPROOF PRO2 158 B2 PC POLY 840	100,00
			0045650	RAP.D SYLPROOF PRO2 258 B2 PC POLY 840	136,50
			0045651	RAP.D SYLPROOF PRO2 136 A2 POLY 840	132,90
			0045652	RAP.D SYLPROOF PRO2 236 A2 POLY 840	181,70
			0045653	RAP.D SYLPROOF PRO2 158 A2 POLY 840	152,70
			0045654	RAP.D SYLPROOF PRO2 258 A2 POLY 840	199,90
				KOMPLETTES ZUBEHÖR passend für alle TYPEN (Pro2 / Eco2 & Cap2)	
			5045818	SYLPROOF Ersatzwanne POLY 118 PRO2	31,60
			5045819	SYLPROOF Ersatzwanne POLY 136 PRO2	31,60
			5045820	SYLPROOF Ersatzwanne POLY 158 PRO2	43,80
			5045821	SYLPROOF Ersatzwanne POLY 236 PRO2	45,20
			5045822	SYLPROOF Ersatzwanne POLY 258 PRO2	53,30
			5045823	SYLPROOF Ersatzwanne ACRYLIC 118 PRO2	24,00
			5045824	SYLPROOF Ersatzwanne ACRYLIC 136 PRO2	24,90
			5045825	SYLPROOF Ersatzwanne ACRYLIC 158 PRO2	31,60
			5045826	SYLPROOF Ersatzwanne ACRYLIC 236 PRO2	33,10
			5045827	SYLPROOF Ersatzwanne ACRYLIC 258 PRO2	38,50
			5045828	SYLPROOF Ersatzwanne STYREN 136 ECO2 **	21,80
			5045829	SYLPROOF Ersatzwanne STYREN 158 ECO2 **	29,40
			5045830	SYLPROOF Ersatzwanne STYREN 236 ECO2 **	30,60
			5045831	SYLPROOF Ersatzwanne STYREN 258 ECO2 **	34,80
			5045970	SYLPROOF Ersatzwanne PMMA 118 CAP2	24,00
			5045971	SYLPROOF Ersatzwanne PMMA 136 CAP2	24,90
			5045972	SYLPROOF Ersatzwanne PMMA 158 CAP2	31,60
			5045973	SYLPROOF Ersatzwanne PMMA 236 CAP2	33,10
			5045974	SYLPROOF Ersatzwanne PMMA 258 CAP2	38,50
			5056750	SYLPROOF REFLEKTOR PRO2 136	23,60
			5056751	SYLPROOF REFLEKTOR PRO2 236	32,20
			5056752	SYLPROOF REFLEKTOR PRO2 158	27,00
			5056753	SYLPROOF REFLEKTOR PRO2 258	35,90
			5045979	SYLPROOF RAPID Schnellanschluß Klemme	8,90
			5045980	SYLPROOF RAPID Schnellanschluß Leitungseinführung	1,10
			5045839	SYLPROOF Deckenbefestigungskl. PRO2/Rapid /CAP2 VE=2	1,00
			5045838	SYLPROOF Geräteträger-Klip	2,90
			5045837	SYLPROOF V2A Wannen-Klip PRO2/Rapid /CAP2 VE=10	3,80
			5045843	SYLPROOF Kabeleinführungsstülle PRO2-CAP2-ECO2 VE=10	1,80
			5045842	SYLPROOF ABHÄNGEHAKEN PRO2-CAP2-ECO2 VE=50	7,00
			5045840	SYLPROOF M20 KABELVERSCHRAUBUNG PRO2/Rapid /CAP2	2,80
			5045832	SYLPROOF DV+Klammer 5X1,5MM² 118 PRO2/Rapid /CAP2	18,30
			5045833	SYLPROOF DV+Klammer 5X1,5MM² 136 PRO2/Rapid /CAP2	21,00
			5045834	SYLPROOF DV+Klammer 5X1,5MM² 158 PRO2/Rapid /CAP2	22,50
			5045835	SYLPROOF DV+Klammer 5X2,5MM² 236 PRO2/Rapid /CAP2	23,50
			5045836	SYLPROOF DV+Klammer 5X2,5MM² 258 PRO2/Rapid /CAP2	26,20
			5045841	SYLPROOF Dichtscheiben PRO2-CAP2-ECO2 SET	2,30
			9056757	SYLPROOF Flex-Rohr+16mm Verschraubung	3,80

*) = not suitable for the german market! **) = NOT FOR GERMANY !